

Date: 07/02/2021

Question Paper Code

65



# Aakash

Medical | IIT-JEE | Foundations

Regd. Office : Aakash Tower, 8, Pusa Road, New Delhi-110005 | Ph.: 011-47623456

## Answers & Solutions

Time : 1 hr

*for*

Max. Marks : 50

### International Olympiad Qualifier (Part II) in PHYSICS (IOQP) 2020-21

#### INSTRUCTIONS TO CANDIDATES

- (1) This booklet consists of 5 questions.
- (2) Booklet to write the answers is provided separately. Instructions to write the answers are on the Answer Booklet.
- (3) Marks will be awarded on the basis of what you write on both the Summary Answer Sheet and the Detailed Answer Sheets in the Answer Booklet. Simple short answers and plots may be directly entered in the Summary Answer Sheet. Marks may be deducted for a absence of detailed work in questions involving longer calculations.
- (4) Strike out any rough work what you do not want to considered for evaluation. You may also use the space on the Question Paper for rough work – this will NOT be evaluated.
- (5) Non-programmable scientific calculators are allowed. Mobile phones **cannot** be used as calculators.
- (6) Last pages of the question paper can be used for rough work.
- (7) Please submit the Answer Booklet at the end of the examination. You may retain the Question Paper.


#### Table of Constants

Speed of light in vacuum	$c$	$3.00 \times 10^8 \text{ ms}^{-1}$
Planck's constant	$h$	$6.63 \times 10^{-34} \text{ Js}$
Magnitude of electron charge	$e$	$1.60 \times 10^{-19} \text{ C}$
Rest mass of electron	$m_e$	$9.11 \times 10^{-31} \text{ kg}$
Value of $1/4\pi\epsilon_0$		$9.00 \times 10^9 \text{ Nm}^2\text{C}^{-2}$
Acceleration due to gravity	$g$	$9.81 \text{ ms}^{-2}$

1. The ammeter-voltmeter method is widely used for measuring electrical resistances in the physics laboratory. In this method, the resistance  $R$  is always derived from the readings  $V$  and  $I$  from a voltmeter and an ammeter respectively, using Ohm's law:  $R = V/I$ . While using this method, it is assumed that the ammeter and voltmeter used in the setup are ideal. In this problem, we will find the pitfalls of this assumption and devise a new setup with a better performance.


The standard ammeter-voltmeter setup consists of a DC voltage source ( $\varepsilon$ ) maintained at a constant voltage, a protection resistance ( $R_p$ ), an ammeter ( $A$ ), and a voltmeter ( $V$ ). The unknown internal resistances of the ammeter and the voltmeter are  $R_A$  and  $R_V$ , respectively. Also,  $R_V \gg R_A$ . We aim to measure the true value  $R$  of an unknown resistor.

We consider a two commonly used circuit configuration (1) and (2) indicated by the two possible positions of the switch in the circuit diagram shown below. Let the measured values of the resistance  $R$  be  $R_{m_1}$  and  $R_{m_2}$  in the setups (1) and (2), respectively. The relative error,  $\Delta$ , is defined as the ratio of the absolute error of the measurement to the actual value :  $\Delta = (R_m - R)/R$ .

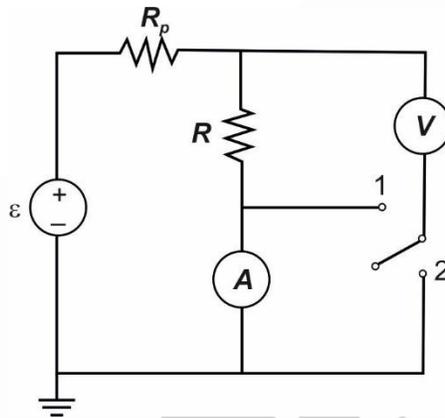

- (a) Obtain the relative errors in the measurements ( $\Delta_1$  and  $\Delta_2$ ) for each of the above configurations. **[2 marks]**
- (b) Using exactly the same circuit elements, can you suggest a step by step procedure, with the necessary circuit diagram(s), to measure the true value of the resistance  $R$ , regardless of the values of the internal resistances of the ammeter and the voltmeter? You may use the measurements made in part (a). **[4 marks]**

**Sol. (a)** 
$$I = \frac{E}{R_p + R_A + \frac{RR_V}{R + R_V}}$$

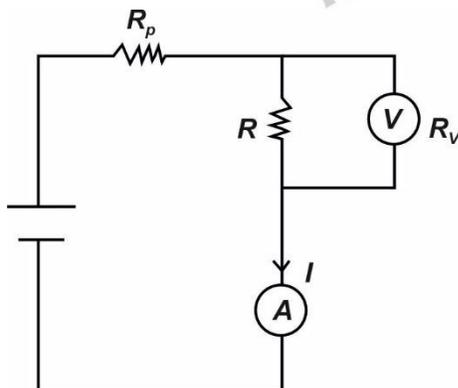

$$V = (I) \frac{RR_V}{R + R_V}$$

$$V = \left( \frac{E}{R_p + R_A + \frac{RR_V}{R + R_V}} \right) \left( \frac{RR_V}{R + R_V} \right)$$

$$R_m = \frac{V}{I} = \frac{E}{\left( R_p + R_A + \frac{RR_V}{R + R_V} \right) \left( \frac{RR_V}{R + R_V} \right)} \left( R_p + R_A + \frac{RR_V}{R + R_V} \right)$$

$$R_m = \left( \frac{RR_V}{R + R_V} \right)$$

$$\Delta_1 = \frac{R_m - R}{R} = \frac{R_V}{R + R_V} - 1 = \left( \frac{-R}{R + R_V} \right)$$

$$\Delta_1 = \frac{-R}{R + R_V}$$

For  $\Delta_2$

$$I_{\text{Batt}} = \frac{E}{R_p + \frac{(R + R_A)R_V}{R + R_A + R_V}}$$

$$I_A = \frac{I_{\text{Batt}} R_V}{(R + R_A + R_V)}$$

$$V = (I_A)(R + R_A)$$

$$\frac{V}{I_A} = (R + R_A)$$

$$R_m = (R + R_A)$$

$$\Delta_2 = \frac{(R + R_A) - R}{R} = \frac{R_A}{R}$$

**Sol. (b)** Step by step procedure

1. When switch is in position 1

$$R_1 = \frac{RR_V}{R + R_V}$$

2. When switch is in position 2

$$R_2 = R + R_A$$

3. Now interchange meter's position and switch in position 1

$$R_3 = \frac{RR_A}{R + R_A}$$

4. Switch in position 2

$$R_4 = R + R_V$$

$$R_1 = \frac{R(R_4 - R)}{R + R_4 - R}$$

$$\Rightarrow R_1 R_4 = R(R_4 - R)$$

In the given equation  $R$  is dependent on reading  $R_1$ ,  $R_4$  only.

$$\Rightarrow R^2 - R_4 R + R_1 R_4 = 0$$

$$\left[ R = \frac{R_4 \pm \sqrt{R_4^2 - 4R_1 R_4}}{2} \right]$$

Since  $R$  should be less than  $R_4$

$$R = \frac{R_4 - \sqrt{R_4^2 - 4R_1 R_4}}{2}$$

2. Prof. Saha gave the following problem to four students.

[8 marks]

In this problem work done by a system on its surroundings is taken as positive. A non-ideal gas follows the Van

der Waals equation of state  $\left(P + \frac{n^2 a}{V^2}\right)(V - nb) = nRT$  where  $P$ ,  $V$ , and  $T$  denote the pressure, volume, and

temperature, respectively;  $n$  is the number of moles;  $R$  is the universal gas constant and  $a$ ,  $b$  are dimensional positive constants. This gas expands adiabatically from an initial temperature  $T_i$  and volume  $V_i$  to a final temperature  $T_f$  and volume  $V_f$ . The adiabatic process is described by an equation of the form  $f(P, V; n, a, b, \alpha) = \text{constant}$ , where  $\alpha$  is a dimensionless number which is greater than 1. It is given that  $\alpha \rightarrow \gamma$  in the ideal gas limit, where  $\gamma$  is the adiabatic exponent. What is the work ( $W$ ) done by the gas in the process?

The four students solved the problem independently and gave four different answers. Their answers were:

$$\begin{aligned} \text{(a)} \quad W &= \frac{nR}{\alpha - 1}(T_i - T_f) + n^2 a(V_f^{-1} - V_i^{-1}) & \text{(b)} \quad W &= \frac{nR}{\alpha - 1}(T_f - T_i) + n^2 a(V_f^{-1} - V_i^{-1}) \\ \text{(c)} \quad W &= \frac{nR}{\alpha - 1}(T_i - T_f) + n^2 a(V_f^{\alpha-1} - V_i^{\alpha-1}) & \text{(d)} \quad W &= \frac{nR}{\alpha - 1}(T_i - T_f) \left[ 1 - \left( \frac{V_f - nb}{V_i - nb} \right)^{\alpha-1} \right] \end{aligned}$$

Now, Prof. Saha had actually provided the exact expression of  $f(P, V; n, a, b, \alpha)$  to the students, but could not remember it during evaluation. Still, he could determine that some or all of the four answers above must be incorrect, based on general physical arguments alone.

Consider each of the four answers and give at least one reason for each of them showing why it is wrong, or possibly correct. Note that you are not required to give a correct expression for  $W$  or a detailed derivation for it in this question.

**Sol. For (a)**

$$W = \frac{nR}{\alpha - 1}(T_i - T_f) + n^2 a(V_f^{-1} - V_i^{-1})$$

is proper according to dimensions and it can be positive.

So, it possibly be correct.

**For (b)**

$$\frac{nR}{(\alpha - 1)}(T_f - T_i) < 0 \text{ as } T_f < T_i$$

$$\text{and } \frac{1}{V_f} - \frac{1}{V_i} < 0 \text{ as } V_f > V_i$$

$\Rightarrow W < 0$  which is not possible.

So, it is incorrect.

**For (c)**

$n^2 a (V_f^{\alpha-1} - V_i^{\alpha-1})$  is not of dimension of energy as  $\alpha \neq 2$ .

So, it is incorrect.

**For (d)**

$$\left( \frac{V_f - nb}{V_i - nb} \right)^{\alpha-1} > 1$$

and  $T_i > T_f$

$\Rightarrow W < 0$  which is incorrect.

3. Consider an electron (mass  $m$ , magnitude of charge  $e$ ) moving initially around a nucleus of charge  $2e$  in a circular orbit of radius  $10^{-10}$  m. In this problem we use SI units throughout and neglect all relativistic effects.

- (a) Obtain the expression for the frequency,  $f$ , of the electron in the circular orbit (numerical value is not required). **[2 marks]**

From classical electrodynamics, we know that an accelerated electron radiates energy. The expression for the power  $P$  of this radiation is given by  $P = K\epsilon_0^w e^x a^y c^z$  where  $a$  is the acceleration,  $c$  is the speed of light,  $\epsilon_0$  is the permittivity of free space, and  $K$  is a dimensionless constant.

- (b) Obtain  $\{w, x, y, z\}$  using dimensional analysis. **[2 marks]**

Due to the loss of energy through radiation, the electron does not remain in the circular orbit, and gradually spirals into the nucleus. Take the constant  $K$  to be  $5.31 \times 10^{-2}$ .

- (c) Let  $T$  be the time it takes for the electron to reach the nucleus. Calculate  $T$  if the radius of the nucleus is  $10^{-14}$  m. **[5 marks]**

**Sol.** (a)  $mr(2\pi f)^2 = \frac{1}{4\pi\epsilon_0} \cdot \frac{e \cdot 2e}{r^2}$

$$f = \sqrt{\frac{e^2}{8\pi^3 \epsilon_0 m r^3}}$$

(b)  $P = K\epsilon_0^w e^x a^y c^z$

$$[ML^2T^{-3}] = [M^{-1}L^{-3}T^4A^2]^w [AT]^x [LT^{-2}]^y [LT^{-1}]^z$$

$$\Rightarrow -w = 1$$

$$\Rightarrow -3w + y + z = 2$$

$$\Rightarrow 4w + x - 2y - z = -3$$

$$\Rightarrow 2w + x = 0$$

On solving  $w = -1$ ,  $x = 2$ ,  $y = 2$ ,  $z = -3$

$$\{w, x, y, z\} = \{-1, 2, 2, -3\}$$

$$(c) \quad -\frac{dE}{dt} = \frac{Ke^2}{\epsilon_0 c^3} (r(2\pi f)^2)^2$$

$$-\frac{d}{dt} \left[ -\frac{e^2}{4\pi\epsilon_0 r} \right] = \frac{Ke^2}{\epsilon_0 c^3} \left( \frac{2e^2}{4\pi\epsilon_0 m r^2} \right)^2$$

$$\frac{e^2}{4\pi\epsilon_0 r^2} \frac{dr}{dt} = \frac{4Ke^6}{(4\pi\epsilon_0)^2 \epsilon_0 m^2 c^3 r^4}$$


$$\int_0^T dt = -\frac{\pi\epsilon_0^2 m^2 c^3}{Ke^4} \int_r^R r^2 dr$$

$$T = \frac{\pi\epsilon_0^2 m^2 c^3}{3Ke^4} (r^3 - R^3)$$

$$= 5.28 \times 10^{-11} \text{ sec}$$

4. Three thin convex lenses  $L_1$ ,  $L_2$  and  $L_3$  with focal lengths  $f_1$ ,  $f_2$  and  $f_3$ , respectively, are arranged in order ( $L_1$  followed by  $L_2$ , followed by  $L_3$  from left to right) with their principal axes coincident. The distance  $d_{12}$  between  $L_1$  and  $L_2$ , and the distance  $d_{23}$  between  $L_2$  and  $L_3$  are such that  $d_{12} + d_{23} \geq f_1 + 4f_2 + f_3$ . If a parallel beam of light incident on  $L_1$  at a small angle to the principal axis remains parallel to itself when leaving the system after passing through  $L_2$  and  $L_3$ , draw the appropriate ray diagram and determine  $d_{12}$  and  $d_{23}$  in terms of  $f_1$ ,  $f_2$  and  $f_3$ . **[12 marks]**

Sol.

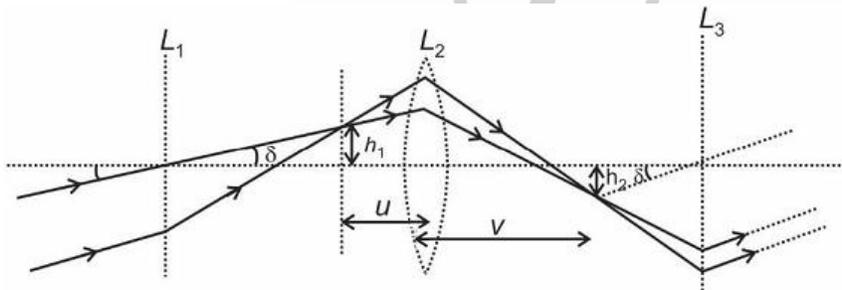

Since emergent rays emerge parallel to incident ray itself, so, image formed by  $L_2$  should lie on focal plane of  $L_3$ .

For no deviation

$$\frac{h_1}{f_1} = \frac{h_2}{f_3}$$

$$\frac{h_1}{h_2} = \frac{f_1}{f_3}, \text{ also } \frac{h_2}{h_1} \text{ is magnification by lens } L_2.$$

$$|u| = \frac{f_2(f_1 + f_3)}{f_3}$$


$$|v| = \frac{f_2(f_1 + f_3)}{f_1}$$

$$d_{12} = |u| + f_1 = \frac{f_2 f_1 + f_2 f_3 + f_1 f_3}{f_3}$$

$$d_{23} = |v| + f_3 = \frac{f_2 f_1 + f_2 f_3 + f_1 f_3}{f_1}$$


5. Two friends, Amina (A) and Beena (B), are sitting at diametrically opposite points of a merry-go-round (taken as a circular disk in the horizontal plane) of radius  $R$  that is rotating at constant angular speed  $\omega$  in the anticlockwise direction, when viewed from the top (see figure below).

When Amina is at the position A (as shown in the figure), she throws a ball with velocity  $\vec{u}$  (relative to the merry-go-round) in such a manner that Beena catches it when she reaches the position C ( $\angle BAC = \alpha$ ). Here  $\vec{u}$  makes an angle  $\theta$  with respect to the horizontal, and  $\phi$  is the angle made by the horizontal projection of  $\vec{u}$  with respect to the line AB. Neglect air resistance, friction, and the effect of throwing or catching the ball on the speed of the merry-go-round.

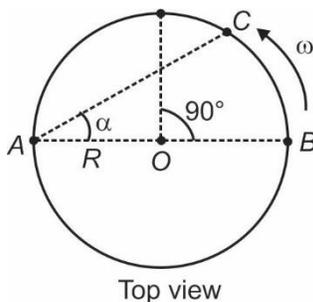

- (a) Determine  $u$ ,  $\theta$  and  $\phi$ , in terms of  $R$ ,  $\omega$ ,  $\alpha$  and other relevant quantities. **[6 marks]**
- (b) If Amina throws the ball with  $\phi = 60^\circ$ , and appropriate values of  $\theta$  and  $u$  such that Beena can catch it, what is the magnitude of the displacement,  $s$ , of the ball when it is caught by Beena? For this part only, take  $R = 1.5$  m, and it is enough to state your answer within a range of 0.5 m. **[3 marks]**
- (c) Determine the speed of throwing  $u_D$  if Beena catches the ball at the point D ( $\angle BOD = 90^\circ$ ), instead of C. **[0.5 marks]**
- (d) What should be the angular speed  $\omega_m$  of the merry-go-round for which the speed of throwing  $u_D$  will be minimum for Beena to catch the ball at the position D? What is this minimum speed of throwing  $u_m$ ? **[3 marks]**
- (e) Consider the case when Amina throws the ball when she is at A, and catches it herself when she reaches the point B (Beena is not involved in this case). Take the angular speed of the merry-go-round to be  $\omega = \sqrt{\frac{g}{R}}$ . Find  $u$ ,  $\theta$  and  $\phi$  in this case. **[2.5 marks]**

**Sol.** (a)  $\vec{u}_b = \vec{u} - R\omega\hat{j}$

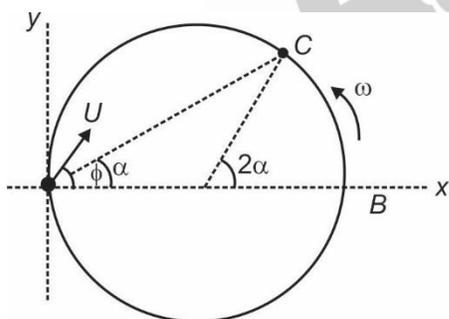

$$= u \cos \theta \cos \phi \hat{i} + u \cos \theta \sin \phi - R\omega \hat{j} + u \sin \theta \hat{k}$$

Time of flight

$$T = \frac{2u \sin \theta}{g} = \frac{2\alpha}{\omega}$$

$$\Rightarrow u \sin \theta = \frac{g\alpha}{\omega} \quad \dots(a)$$

We also know

$$R + R \cos 2\alpha = (u \cos \theta \cos \phi) \left( \frac{2\alpha}{\omega} \right) \quad \dots(i)$$

$$R \sin 2\alpha = (u \cos \theta \sin \phi - R\omega) \left( \frac{2\alpha}{\omega} \right) \quad \dots(ii)$$

Using (i) & (ii)

$$u \cos \theta = R\omega \sqrt{1 + \frac{\cos^2 \alpha}{\alpha^2} + \frac{\sin 2\alpha}{\alpha}} \quad \dots(b)$$

Using (a) & (b)

$$u = \left[ \frac{g^2 \alpha^2}{\omega^2} + R^2 \omega^2 + \left( \frac{R\omega \cos \alpha}{\alpha} \right)^2 + R^2 \omega^2 \frac{\sin 2\alpha}{\alpha} \right]^{1/2}$$

$$\theta = \tan^{-1} \left( \frac{g\alpha}{R\omega^2 \left( 1 + \frac{\cos^2 \alpha}{\alpha^2} + \frac{\sin 2\alpha}{\alpha} \right)^{1/2}} \right)$$

Substituting  $u \cos \theta$  in (i)

$$\phi = \cos^{-1} \left( \frac{\cos^2 \alpha}{\sqrt{\alpha^2 + \cos^2 \alpha + \alpha \sin 2\alpha}} \right)$$

(b) for  $\phi = 60^\circ$

$$\begin{aligned} \cos \alpha &\approx 0.8, \text{ displacement } AC = 2R \cos \alpha \\ &= 2 \times 1.5 \times 0.8 \\ &= 2.4 \text{ m} \end{aligned}$$

(c) For  $\alpha = 45^\circ$

$$u = \left( \frac{\pi^2 g^2}{16\omega^2} + R^2 \omega^2 \left( 1 + \frac{8}{\pi^2} \right) + \frac{4R^2 \omega^2}{\pi} \right)^{1/2}$$

(d)  $\frac{du^2}{d\omega}$  for minimum = 0

$$0 = \frac{\pi^2 g^2}{16} (-2\omega^{-3}) + 2R^2 \left( 1 + \frac{8}{\pi^2} \right) \omega + \frac{8R^2}{\pi} \omega$$

$$\Rightarrow \omega_m = \left[ \frac{\pi^4 g^2}{8(16 + 8\pi + 2\pi^2)R^2} \right]^{1/4}$$

$$\Rightarrow u_m = \frac{\pi g}{2\sqrt{2}\omega_m}$$

(e)  $T = \frac{2u \sin \theta}{g} = \frac{\pi}{\omega} \Rightarrow u \sin \theta = \frac{\pi}{2} \sqrt{gR}$

$$u \cos \theta \cos \phi \cdot \frac{\pi}{\omega} = 2R$$

$$u \cos \theta \sin \phi - R \omega = 0$$

$$\Rightarrow u \cos \theta = \sqrt{gR} \left( 1 + \frac{4}{\pi^2} \right)^{1/2}$$

$$\Rightarrow u = \sqrt{gR} \left( 1 + \frac{4}{\pi^2} + \frac{\pi^2}{4} \right)^{1/2}$$

$$\theta = \tan^{-1} \left( \frac{\pi^4}{4\pi^2 + 16} \right)^{1/2}$$

$$\phi = \tan^{-1} \left( \frac{\pi}{2} \right)$$

